



# SPECTRUM III HYBRID

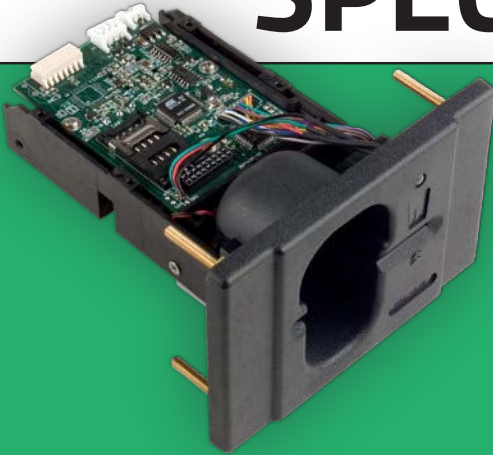

## INTELLIGENT OEM INSERT READER MODULE

### KEY FEATURES:

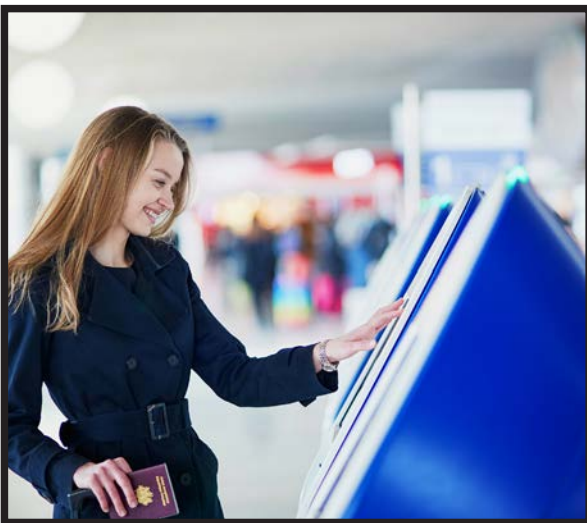

- Reads & decodes up to three tracks of magnetically-encoded information
- Spring-loaded magnetic head ensures optimal contact with cards
- Fully-intelligent unit can be configured to read all tracks or selected tracks from magnetic stripe
- Can output data with a terminating character & up to nine prefix & postfix characters
- Reads media conforming to ISO 7810 & 7811 standards



# SPECTRUM III HYBRID SPECS

<b>DIMENSIONS</b>	117mm (L) x 101mm (W) x 9.88mm (H)
<b>HUMIDITY</b>	Maximum 95%, Non-Condensing
<b>INTERFACE</b>	RS232, USB PC/SC & USB RS232
<b>MEDIA FORMAT</b>	ISO 7811, F2F Media with Magnetic Coercivity of 300 - 4,000 Oersted can be Read
<b>MEDIA THICKNESS</b>	0.635mm to 0.889mm
<b>OPERATING TEMPERATURE</b>	0°C to 55°C
<b>POWER</b>	+5 VDC/70mA / +5 VDC/80mA *(Power Adapter Regulated 5 VDC/ 500mA or Equivalent)
<b>STORAGE TEMPERATURE</b>	-30°C to 65°C
<b>WARRANTY</b>	One Year, Parts & Labor



## CORPORATE HEADQUARTERS

10721 WALKER STREET  
CYPRESS, CA 90630  
T: (714) 761-6368  
TF: (800) 984-1010  
F: (714) 761-8880  
SALES@IDTECHPRODUCTS.COM

## ASIA

+886-3-326-5988 (TAIWAN)  
ASIA@IDTECHPRODUCTS.COM

## LATIN AMERICA

(714) 761-6368  
SALES@IDTECHPRODUCTS.COM

## EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED  
ISO 14001 CERTIFIED

# IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

