



MINISMART II


EMV L1

CERTIFIED

CONTACT READER

OEM MODULE

ID TECH's latest EMV module, the MiniSmart II, carries on the tradition of its predecessor, the MiniSmart. Maintaining a compact form factor, along with the familiar supported interfaces of USB, UART, and RS232, the MiniSmart II allows for easy integration into today's payment applications requiring EMV acceptance. With EMV acceptance becoming an international payment standard, the MiniSmart II brings forth a small enough form factor to adapt into a wide variety of space-limited applications.

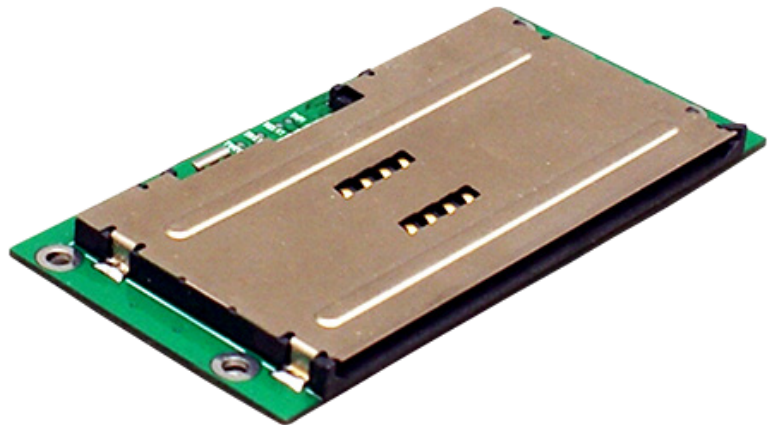

10721 Walker Street
Cypress, CA 90630

(714) 761-6368
@ sales@idtechproducts.com

 www.idtechproducts.com

SECURE AND ROBUST EMV L1 MODULE

CONTACT US TODAY!

CORPORATE HEADQUARTERS
10721 WALKER STREET CYPRESS,
CA 90630
TEL: (714) 761-6368
TF: (800) 984-1010
FAX: (714) 761-8880
SALES@IDTECHPRODUCTS.COM

ASIA
+886-3-326-5988 (TAIWAN)
ASIA@IDTECHPRODUCTS.COM

CANADA
(714) 761-6368
CANADA@IDTECHPRODUCTS.COM

SOUTH AMERICA
+55-11-3079-2255
INTERNATIONALSALES@
IDTECHPRODUCTS.COM

EUROPE, MIDDLE EAST & AFRICA
EMEA@IDTECHPRODUCTS.COM

MINISMART II SPECS

POWER REQUIREMENTS	4.5 VDC to 5.5 VDC, 32mA Max. w/no ICC
POWER DOWN	100 μ A max in power down w/no ICC
ICC INTERFACES	ISO/IEC 7816-1, 2, 3, & 4
ICC TYPES	Number of cards= 1, Asynchronous, T=0 & T=1 Synchronous (memory) cards (contact factory)
ICC TRANSMISSION	9.6 Kbps to 115 Kbps speeds
INTERFACE	USB-HID, UART, RS232
OPERATING TEMPS	0°C to 55°C (32°F to 131°F)
STORAGE TEMPS	-30°C to 65°C (-22°F to 149°F)
HUMIDITY	Max 95% non-condensing
OPERATING LIFE	500,000 cycles minimum
MTBF	300,000 Hours
ESD IMMUNITY	4 KV, human body model, ICC contacts
WARRANTY	One year, parts and labor
DIMENSIONS	2.60 inches (66 mm) x 1.31 inches (33.2 mm) x .32 inches (8mm)
MEDIA THICKNESS	0.03 Nominal (0.025min.; 0.035 inches max.)
CARD SEATED SWITCH	ICC fully seated sensor

ISO 9001 CERTIFIED
ISO 14001 CERTIFIED

