


MSR ASSEMBLIES



CUSTOMIZABLE MAGSTRIPE RAIL

KEY FEATURES:

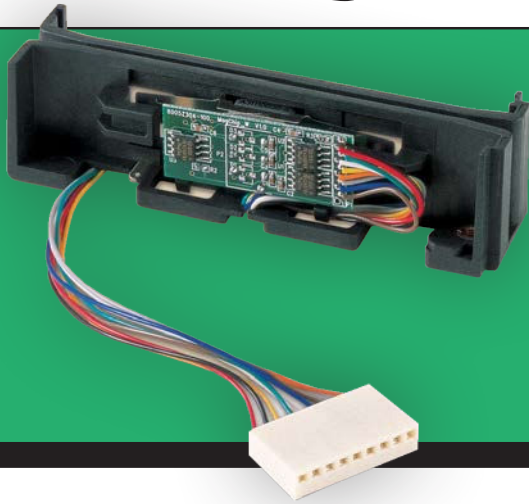


- Low-power Trimag Chip™ Technology
- 90mm rail reads up to three tracks of data
- Single or dual read head options
- Configurable data format
- Fully customizable
- Warranted for 1 million (minimum) card passes
- JIS compatible 90mm readers available



MSR ASSEMBLY SPECS

CARD THICKNESS	.01 to .045 Inches (.25mm to 1.14mm)
COMMUNICATION	SPI, UART, USB
DIMENSIONS	90mm (W) x 24mm (D) x 24mm (H)
HUMIDITY	10% to 98% Relative Humidity, Non-Condensing
MAGSTRIPE & RAIL OPERATING LIFE	1,000,000 Cycles (Minimum)
OPERATING CURRENT	1.1mA per Track When Reading a Card; <30µA in "Sleep" Mode
OPERATING TEMPERATURE	-40°C to 70°C
POWER REQUIREMENTS	Operation from 2.7 to 5.5VDC, Ground 0 VDC (GND); Chassis Ground Connected to GND & Magnetic Head Case; True Automatic Gain Control (AGC) Handles Signal Amplitudes from 1 mV to 1V Peak-to-Peak
READ RATE	Less than One Error in 100,000 Bits on Cards Conforming to ISO 7811 1-5
STANDARD DECODING DENSITIES	Track 1: 210 BPI Track 2: 75 or 210 BPI Track 3: 210 BPI
STORAGE TEMPERATURE	-40°C to 85°C
SWIPE SPEED	3 to 60 Inches Per Second, Bi-Directional

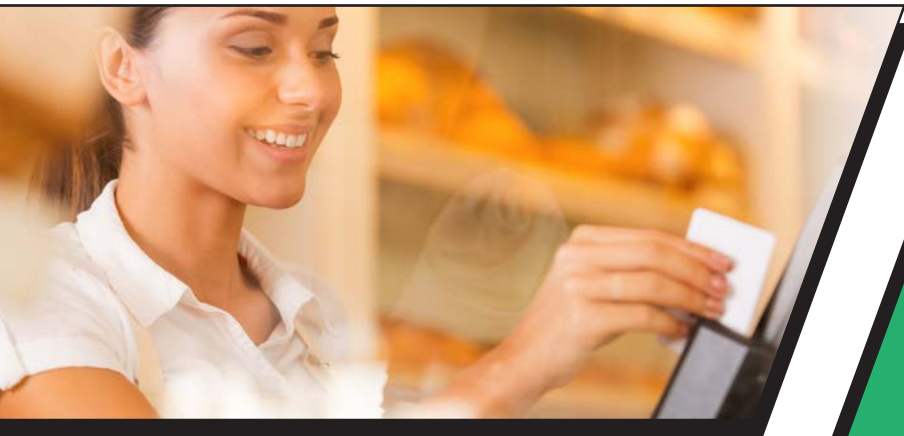

CORPORATE HEADQUARTERS

10721 WALKER STREET
CYPRESS, CA 90630
T: (714) 761-6368
TF: (800) 984-1010
F: (714) 761-8880
SALES@IDTECHPRODUCTS.COM

ASIA

+886-3-326-5988 (TAIWAN)
ASIA@IDTECHPRODUCTS.COM

LATIN AMERICA

(714) 761-6368
SALES@IDTECHPRODUCTS.COM

EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED
ISO 14001 CERTIFIED

IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

