



SMARTPIN L100

**PCI 4.X CERTIFIED
PIN PAD**

KEY FEATURES:




- Designed for outdoor unattended POS where encrypted PIN entry is needed
- PCI 4.X certified PIN entry device
- Supports TDES encryption
- DUKPT key management
- Wide temperature range
- Outdoor rated - IK 09 / IP 65



SMARTPIN L100 SPECS

APPROVALS	CE; FCC; PCI PTS 4.X
DIMENSIONS	140mm (H) x 107.5mm (W) x 27.9mm (D)
DISPLAY	160 x 64 Pixels
ESD IMMUNITY	Minimum 4kV Direct Contact & 8kV Air Discharge w/out Resetting
HUMIDITY	Maximum 95% Non-Condensing
INTERFACE	Direct Connection to Spectrum Pro/VP5300, RS232 & USB-HID
KEYS	Numeric (12), Operation (4) & Function (3)
KEY DURABILITY	Minimum 2,000,000 Key Presses Paired with Spectrum Pro/VP5300
MTBF	120,000 Power-On Hours Calculated
OPERATING TEMPERATURE	-25°C to 70°C
POWER	5VDC; ±10%, 180mA Maximum
STORAGE TEMPERATURE	-30°C to 80°C

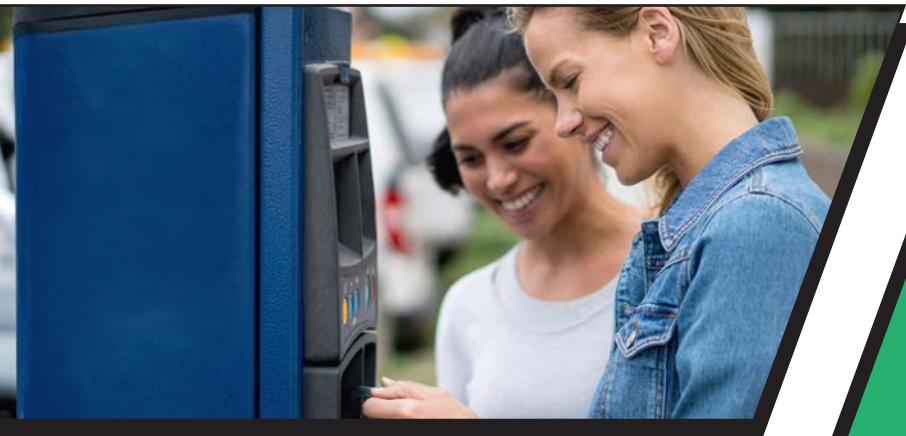

CORPORATE HEADQUARTERS

10721 WALKER STREET
CYPRESS, CA 90630
T: (714) 761-6368
TF: (800) 984-1010
F: (714) 761-8880
SALES@IDTECHPRODUCTS.COM

ASIA

+886-3-326-5988 (TAIWAN)
ASIA@IDTECHPRODUCTS.COM

LATIN AMERICA

(714) 761-6368
SALES@IDTECHPRODUCTS.COM

EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED
ISO 14001 CERTIFIED

IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

