

GAMING READER



MAGNETIC PARTIAL INSERT READER


KEY FEATURES:

- Supports single, dual, or triple track magnetic heads
- Stainless steel roller design reduces card scratching
- Vandal resistant bezel, chassis & read-head
- Proprietary design removes ESD from card surface
- Bezel options compatible with industry-standard mounting options
- Capability of lengthening insertion depth - 2 options
- Large debris slot for jam-proof operation



GAMING READER SPECS

DIMENSIONS	88.66mm (W) x 60mm (D) x 25.4mm (H)
INTERFACE	RS232, TTL, USB
OPERATING LIFE	1,000,000 Cycles (Minimum)
OPERATING TEMPERATURE	0°C to 60°C
POWER	RS232 35m Max. USB +5 DC TTL Standby Mode: 100µA Max Operating Mode: 3mA Max
SHOCK	Sweep 10Hz to 50Hz/min; 294 m/s ² (30G)
STORAGE TEMPERATURE	-40°C to 60°C
SWIPE SPEED	3 to 60 Inches per Second, Bi-Directional
WARRANTY	One Year, Parts & Labor
WEIGHT	136g (.30 lbs)

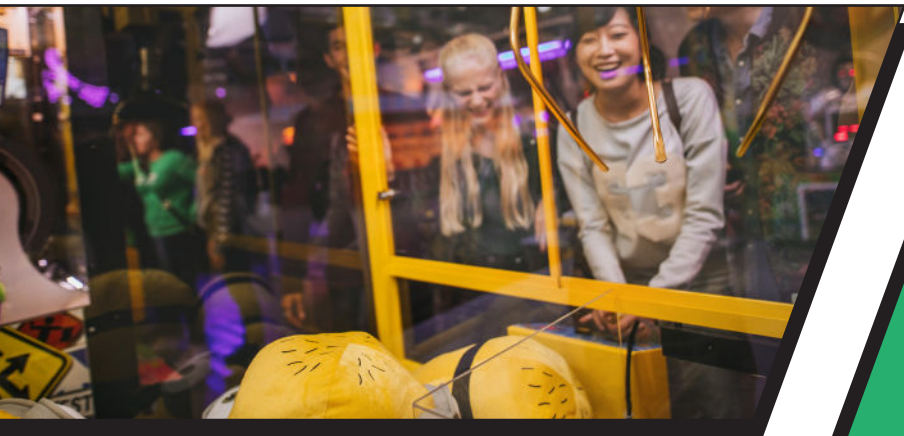

CORPORATE HEADQUARTERS

10721 WALKER STREET
CYPRESS, CA 90630
T: (714) 761-6368
TF: (800) 984-1010
F: (714) 761-8880
SALES@IDTECHPRODUCTS.COM

ASIA

+886-3-326-5988 (TAIWAN)
ASIA@IDTECHPRODUCTS.COM

LATIN AMERICA

(714) 761-6368
SALES@IDTECHPRODUCTS.COM

EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED
ISO 14001 CERTIFIED

IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

