



SMARTPIN L80

COMPACT PCI PTS 6.X PIN PAD

**available with or without LCD screen*

KEY FEATURES:




- Can support EMV contact/contactless when connected to VP5300/VP5300M
- Compact footprint
- User friendly tactile keys
- Low power consumption
- DUKPT key management
- AES & TDES encryption supports online & offline PIN



SMARTPIN L80 SPECS

APPROVALS	CE; FCC; PCI PTS 6.X; REACH; RoHS; VCCI
DIMENSIONS	45mm (H) x 127mm (W) x 36mm (D)
DISPLAY	128 x 32 Pixels
ESD IMMUNITY	±6kV Contact & ±10kV Air Discharge to Exposed Surfaces
HUMIDITY	15% to 95% Non-Condensing
IMPACT / WEATHER RATING	IK 08 / IP 65
INTERFACE	RS232 & USB
KEYS	Numeric (10), Operation (2) & Function (3)
KEY DURABILITY	Minimum 1,000,000 Key Presses
KEY MANAGEMENT	DUKPT
MTBF	120,000 Power-On Hours Calculated
OPERATING TEMPERATURE	-20°C to 70°C
POWER	5VDC; Power Consumption: <200mA
STORAGE TEMPERATURE	-40°C to 80°C

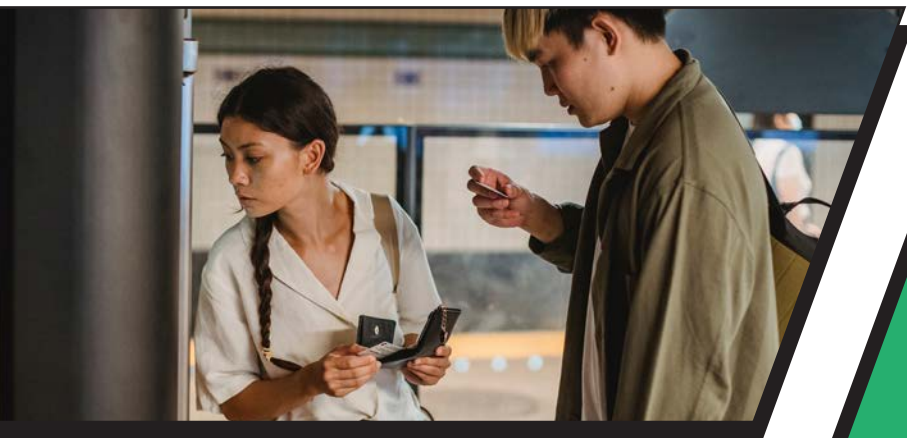

CORPORATE HEADQUARTERS

10721 WALKER STREET
 CYPRESS, CA 90630
 T: (714) 761-6368
 TF: (800) 984-1010
 F: (714) 761-8880
 SALES@IDTECHPRODUCTS.COM

ASIA

+886-3-326-5988 (TAIWAN)
 ASIA@IDTECHPRODUCTS.COM

LATIN AMERICA

(714) 761-6368
 SALES@IDTECHPRODUCTS.COM

EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED
 ISO 14001 CERTIFIED

IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

