

VP5300M BUNDLE

INCLUDES:

VP5300M, VP5300 NFC ANTENNA & CHOICE OF SMARTPIN L80 OR SMARTPIN L120



VP5300M



VP5300 NFC
ANTENNA



your choice of



SMARTPIN L80



SMARTPIN L120

KEY FEATURES:




- All payment options: PCI certified hybrid insert reader & PIN pad, NFC contactless antenna
- Contactless acceptance: compatible with ISO 14443, ISO 18092 peer-to-peer & Mifare; supports loyalty programs, EMV & NFC payments & latest contactless ticketing functionality
- Eco-friendly: low power stand-by & stop modes
- Flexible communications & connectivity
- Rugged & tamper resistant with high IK & IP ratings
- Highest encryption security including AES, RSA & TDES



VP5300M BUNDLE SPECS

	VP5300M	VP5300 NFC ANTENNA	SMARTPIN L80	SMARTPIN L120
BEEPER / LEDS	BEEPER, LED	BASED ON EMV SPECS	BEEPER, STATUS LED	BEEPER, STATUS LED
CARD READERS	CONTACT, EMV, MAGSTRIPE	CONTACTLESS EMV	N/A	N/A
CONNECTIONS	ETHERNET, RS232, USB	CONNECTS TO VP5300	CONNECTS TO VP5300	CONNECTS TO VP5300
DIMENSIONS	163mm (W) x 65mm (L) x 27.5mm (D)	55mm (W) x 65mm (L) x 14.5mm (D)	93.5mm (W) x 60mm (L) x 26.4mm (D)	107.5mm (W) x 140mm (L) x 28.4mm (D)
IMPACT RATING	IP42	IP65	IP65	IP65
KEYBOARD	N/A	N/A	15 KEYS (ADA COMPLIANT)	19 KEYS (ADA COMPLIANT)
LCD DISPLAY	N/A	N/A	OPTIONAL	YES
OPERATING TEMP.	0°C to 50°C	-25°C to 70°C	-20°C to 70°C	-25°C to 70°C
PCI PTS	5.X	5.X	6.X	6.X
POWER SUPPLY	EXTERNAL POWER SUPPLY 12V TO 24V	POWERED BY VP5300	POWERED BY VP5300	POWERED BY VP5300
SRED	YES	YES	YES	YES
STORAGE TEMP.	-20°C to 70°C	-40°C to 80°C	-40°C to 80°C	-30°C to 80°C
WEATHER RATING	IK07	IK10	IK08	IK09
WEIGHT	0.51 KG	0.056 KG	0.111 KG	0.52 KG

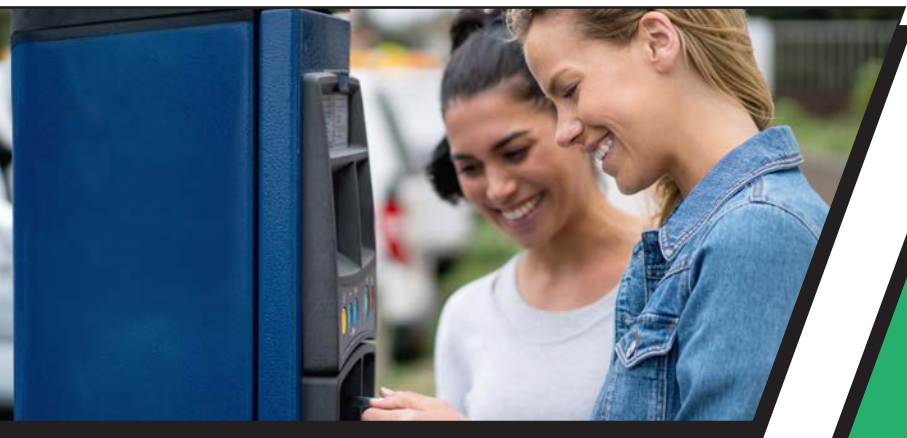

IDTECH®
Value through Innovation

IDTECHPRODUCTS.COM



CORPORATE HEADQUARTERS

10721 WALKER STREET
CYPRESS, CA 90630
T: (714) 761-6368
TF: (800) 984-1010
F: (714) 761-8880
SALES@IDTECHPRODUCTS.COM

ASIA

+886-3-326-5988 (TAIWAN)
ASIA@IDTECHPRODUCTS.COM

LATIN AMERICA

(714) 761-6368
SALES@IDTECHPRODUCTS.COM

EUROPE, MIDDLE EAST & AFRICA
EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED
ISO 14001 CERTIFIED