

MINIMAG II



USB MAGNETIC STRIPE READER

KEY FEATURES:




- Bi-directional card reading of up to three tracks of info at 3 to 60 inches per second
- 6 Foot Side Exit Cable (Bottom Exit Option Available)
- Flat Surface Design for Various Mounting Positions
- Tri-colored LED, beeper (excluding port-powered model)
- Compact, 90mm design
- ISO 7811, AAMVA & Other F2F Formats



MINIMAG II SPECS

CABLE CONNECTOR	Keyboard - 6 Pin Mini - DIN, RS232 DB9F & USB-Type A
CABLE LENGTH	6 Foot Side Exit Cable (Bottom Exit Option)
CARD SPEED	5 to 65 Inches per Second
DIMENSIONS	90mm (L) x 34mm (W) x 28mm (D)
HUMIDITY	Maximum 95% Non-Condensing, Dry Storage
INTERFACE	Keyboard (PS/2), RS232, RS232 Port Powered, USB-CDC/HID/KB
MEDIA FORMAT	AAMVA, ISO7811 & Other F2F Formats
MEDIA THICKNESS	0.015 Inches to 0.05 Inches
OPERATING LIFE	1,000,000 Card Swipes Minimum
OPERATING TEMPERATURE	0°C to 55°C
POWER	+5 VDC from USB Port
SLOT WIDTH	0.040 Inches
STORAGE TEMPERATURE	-30°C to 70°C
WEIGHT	4.6 oz

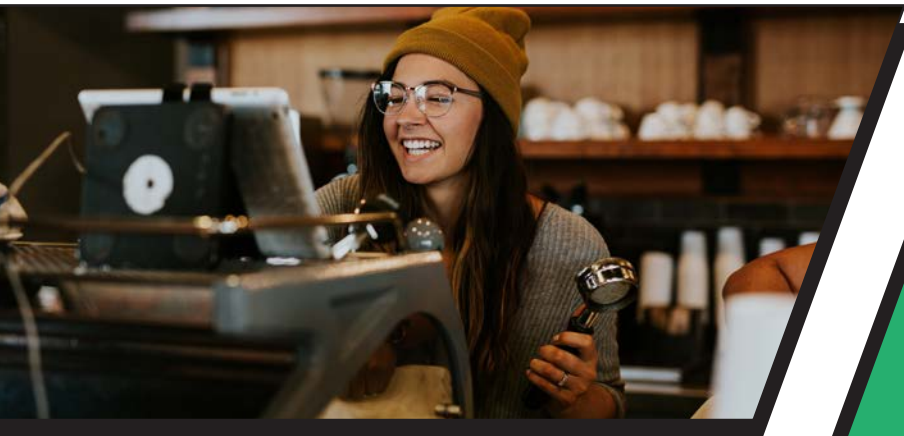

CORPORATE HEADQUARTERS

10721 WALKER STREET
 CYPRESS, CA 90630
 T: (714) 761-6368
 TF: (800) 984-1010
 F: (714) 761-8880
 SALES@IDTECHPRODUCTS.COM

ASIA

+886-3-326-5988 (TAIWAN)
 ASIA@IDTECHPRODUCTS.COM

LATIN AMERICA

(714) 761-6368
 SALES@IDTECHPRODUCTS.COM

EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED
 ISO 14001 CERTIFIED

IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

