



# SMARTPIN L100

**PCI 4.X CERTIFIED  
PIN PAD**

## KEY FEATURES:




- Designed for outdoor unattended POS where encrypted PIN entry is needed
- PCI 4.X certified PIN entry device
- Supports TDES encryption
- DUKPT key management
- Wide temperature range
- Outdoor rated - IK 09 / IP 65



# SMARTPIN L100 SPECS

<b>APPROVALS</b>	CE; FCC; PCI PTS 4.X
<b>DIMENSIONS</b>	140mm (H) x 107.5mm (W) x 27.9mm (D)
<b>DISPLAY</b>	160 x 64 Pixels
<b>ESD IMMUNITY</b>	Minimum 4kV Direct Contact & 8kV Air Discharge w/out Resetting
<b>HUMIDITY</b>	Maximum 95% Non-Condensing
<b>INTERFACE</b>	Direct Connection to Spectrum Pro/VP5300, RS232 & USB-HID
<b>KEYS</b>	Numeric (12), Operation (4) & Function (3)
<b>KEY DURABILITY</b>	Minimum 2,000,000 Key Presses Paired with Spectrum Pro/VP5300
<b>MTBF</b>	120,000 Power-On Hours Calculated
<b>OPERATING TEMPERATURE</b>	-25°C to 70°C
<b>POWER</b>	5VDC; ±10%, 180mA Maximum
<b>STORAGE TEMPERATURE</b>	-30°C to 80°C

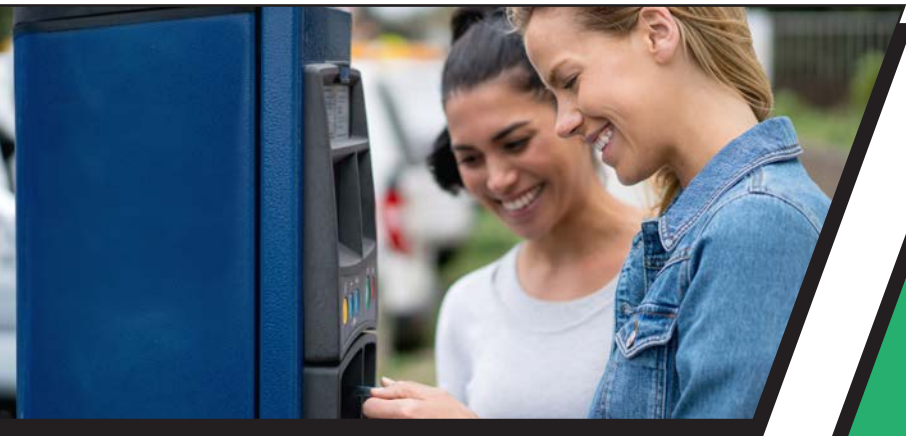

## CORPORATE HEADQUARTERS

10721 WALKER STREET  
CYPRESS, CA 90630  
T: (714) 761-6368  
TF: (800) 984-1010  
F: (714) 761-8880  
SALES@IDTECHPRODUCTS.COM

## ASIA

+886-3-326-5988 (TAIWAN)  
ASIA@IDTECHPRODUCTS.COM

## LATIN AMERICA

(714) 761-6368  
SALES@IDTECHPRODUCTS.COM

## EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED  
ISO 14001 CERTIFIED

# IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

