



# SMARTPIN L80

## COMPACT PCI PTS 6.X PIN PAD

*\*available with or without LCD screen*

### KEY FEATURES:




- Can support EMV contact/contactless when connected to VP5300/VP5300M
- Compact footprint
- User friendly tactile keys
- Low power consumption
- DUKPT key management
- AES & TDES encryption supports online & offline PIN



# SMARTPIN L80 SPECS

<b>APPROVALS</b>	CE; FCC; PCI PTS 6.X; REACH; RoHS; VCCI
<b>DIMENSIONS</b>	45mm (H) x 127mm (W) x 36mm (D)
<b>DISPLAY</b>	128 x 32 Pixels
<b>ESD IMMUNITY</b>	±6kV Contact & ±10kV Air Discharge to Exposed Surfaces
<b>HUMIDITY</b>	15% to 95% Non-Condensing
<b>IMPACT / WEATHER RATING</b>	IK 08 / IP 65
<b>INTERFACE</b>	RS232 & USB
<b>KEYS</b>	Numeric (10), Operation (2) & Function (3)
<b>KEY DURABILITY</b>	Minimum 1,000,000 Key Presses
<b>KEY MANAGEMENT</b>	DUKPT
<b>MTBF</b>	120,000 Power-On Hours Calculated
<b>OPERATING TEMPERATURE</b>	-20°C to 70°C
<b>POWER</b>	5VDC; Power Consumption: <200mA
<b>STORAGE TEMPERATURE</b>	-40°C to 80°C

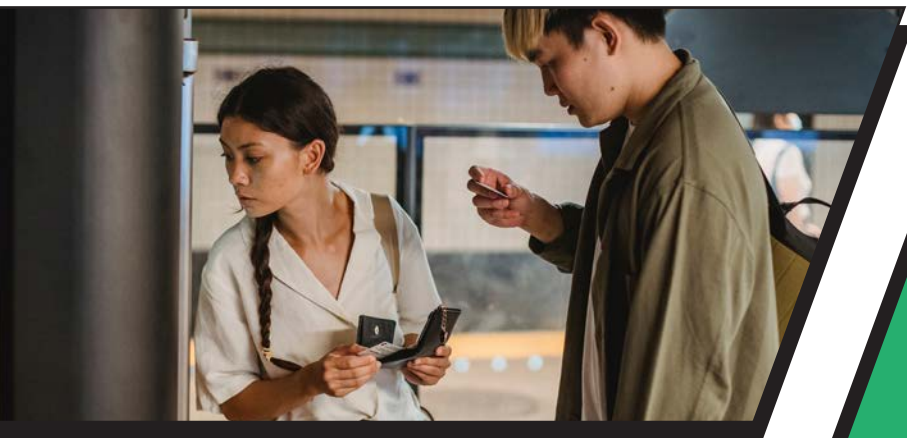

## CORPORATE HEADQUARTERS

10721 WALKER STREET  
 CYPRESS, CA 90630  
 T: (714) 761-6368  
 TF: (800) 984-1010  
 F: (714) 761-8880  
 SALES@IDTECHPRODUCTS.COM

## ASIA

+886-3-326-5988 (TAIWAN)  
 ASIA@IDTECHPRODUCTS.COM

## LATIN AMERICA

(714) 761-6368  
 SALES@IDTECHPRODUCTS.COM

## EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED  
 ISO 14001 CERTIFIED

# IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

