


SPECTRUM III HYBRID



INTELLIGENT OEM INSERT READER MODULE

KEY FEATURES:

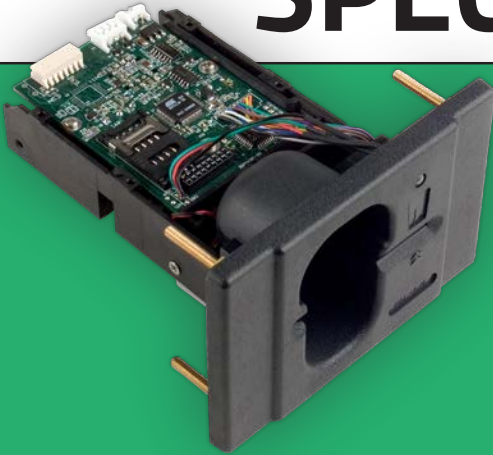

- Reads & decodes up to three tracks of magnetically-encoded information
- Spring-loaded magnetic head ensures optimal contact with cards
- Fully-intelligent unit can be configured to read all tracks or selected tracks from magnetic stripe
- Can output data with a terminating character & up to nine prefix & postfix characters
- Reads media conforming to ISO 7810 & 7811 standards



SPECTRUM III HYBRID SPECS

DIMENSIONS	117mm (L) x 101mm (W) x 9.88mm (H)
HUMIDITY	Maximum 95%, Non-Condensing
INTERFACE	RS232, USB PC/SC & USB RS232
MEDIA FORMAT	ISO 7811, F2F Media with Magnetic Coercivity of 300 - 4,000 Oersted can be Read
MEDIA THICKNESS	0.635mm to 0.889mm
OPERATING TEMPERATURE	0°C to 55°C
POWER	+5 VDC/70mA / +5 VDC/80mA *(Power Adapter Regulated 5 VDC/ 500mA or Equivalent
STORAGE TEMPERATURE	-30°C to 65°C
WARRANTY	One Year, Parts & Labor



CORPORATE HEADQUARTERS

10721 WALKER STREET
CYPRESS, CA 90630
T: (714) 761-6368
TF: (800) 984-1010
F: (714) 761-8880
SALES@IDTECHPRODUCTS.COM

ASIA

+886-3-326-5988 (TAIWAN)
ASIA@IDTECHPRODUCTS.COM

LATIN AMERICA

(714) 761-6368
SALES@IDTECHPRODUCTS.COM

EUROPE, MIDDLE EAST & AFRICA

EMEA@IDTECHPRODUCTS.COM

ISO 9001 CERTIFIED
ISO 14001 CERTIFIED

IDTECH®

Value through Innovation

IDTECHPRODUCTS.COM

